

INSTRUCTION MANUAL OF

MULTIMEDIA MMI & VNS AUX

AUDI MMI A6 A8 Q7




1. PLEASE FIND YOUR MMI CONTROLLER BEHIND
THE GLOVE COMPARTMENT.

ATTENTION!!!


2. BEFORE YOU WILL DISCONNECT CONNECTORS
FROM MMI INTERFACE PLEASE MAKE SURE THAT
IGNITION AND MMI SYSTEM IS COMPLETELY
SWITCHED OFF (OTHERWISE YOUR MMI SYSTEM
COULD UNDERGO DAMAGE).




3. TO 16PIN PLEASE CONNECT WIRE FROM CABLE
HARNESSES OF MULTIMEDIA ADAPTER. IT WILL
ENABLE YOU TO CONTROL/SWITCH OVER
AV1/AV2/AV3/RGB AND SWITCH OF MULTIMEDIA
ADAPTER BY BUTTON „NAME”.

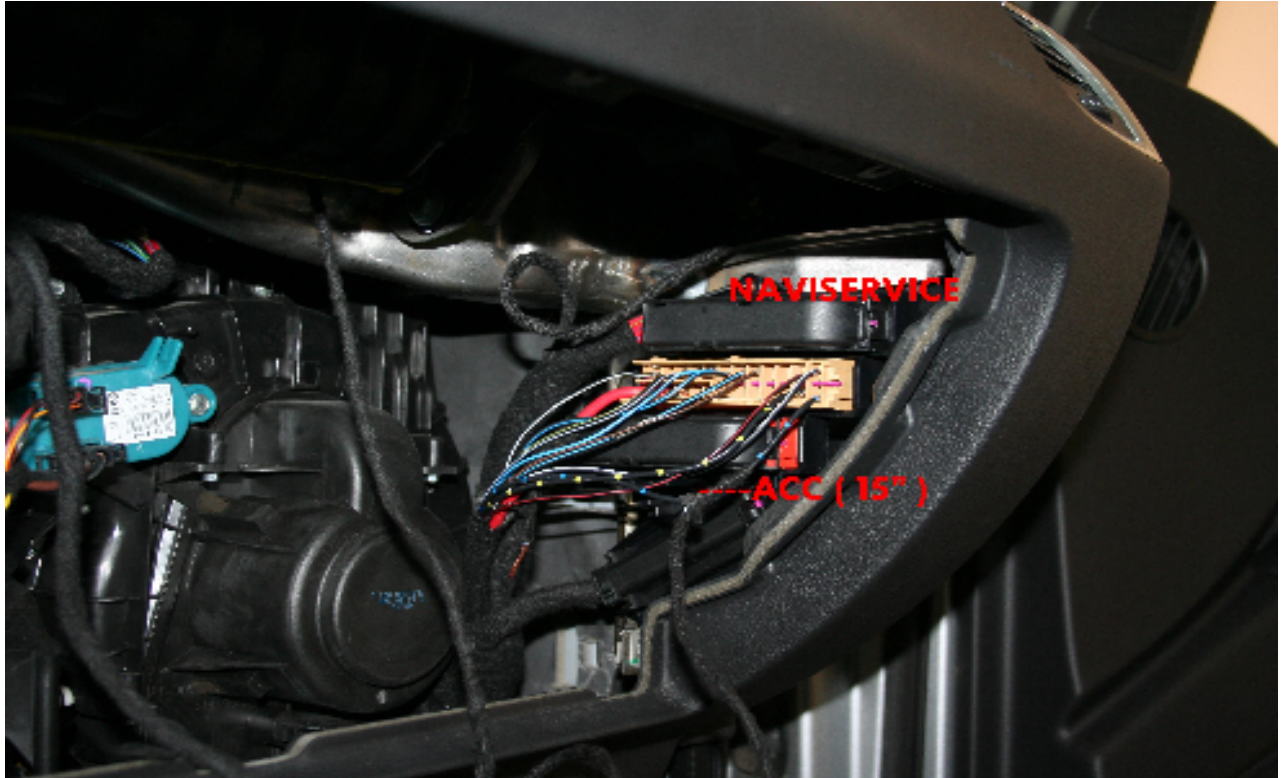

4. POWER OF ADAPTER PLEASE CONNECT TO + IGNITION KEY. ACC 15" A MINUS – GND TO CAR BODY (IF YOU INSTALL REAR VIEW CAMERA CONNECT POWER TO ACC 15"). AUTOMATIC SWITCH ON REAR VIEW CAMERA IS POSSIBLE ONLY IF BLUE CABLE FROM ADAPTER'S HARNESS WILL BE CONNECTED TO AUDI ILM CONTROLLER. IN AUDI Q7 CARS ILM IS LOCATED NEXT TO THE NAVIGATION AND WIRE FROM REVERSE GEAR'S BULB HAS A GREEN COLOUR WITH BLACK LINE.

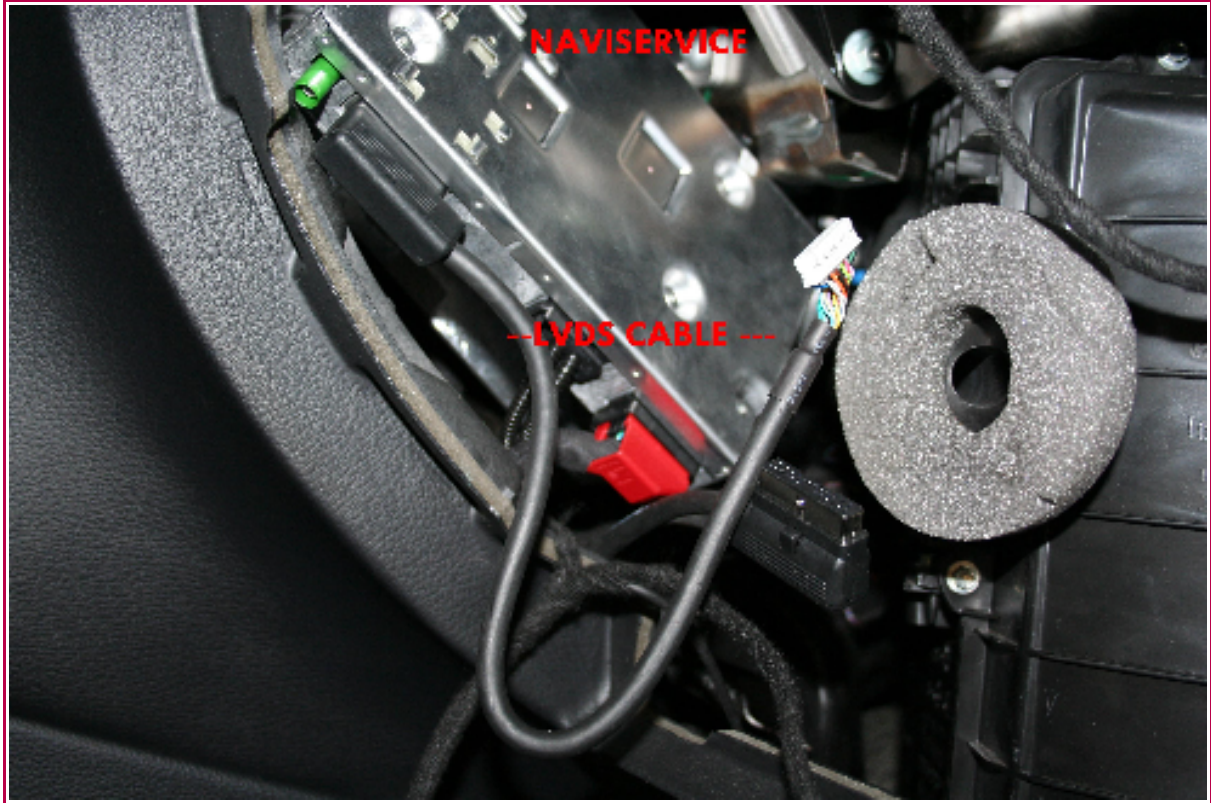

5. TO MMI CONTROLLER CONNECT LVDS CABLE FROM ADAPTER
AND ALL FACTORY CONNECTORS.

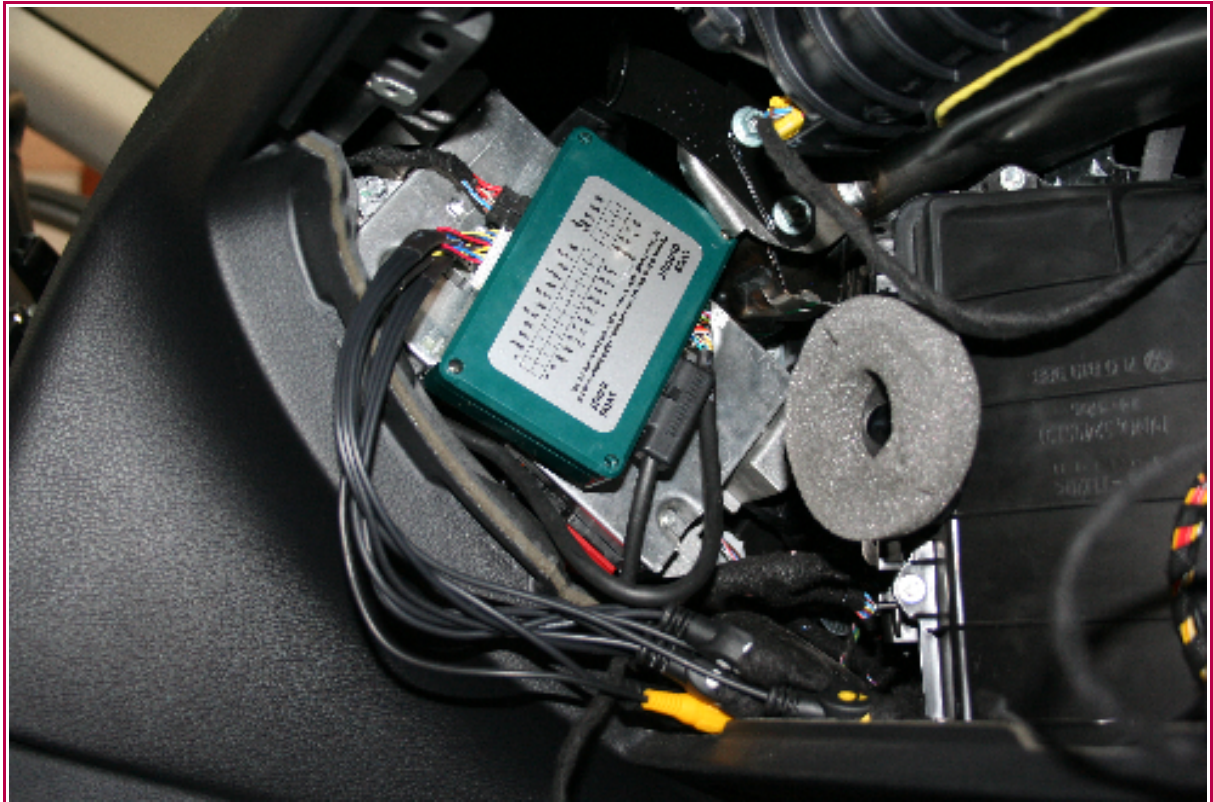

6. CONNECT MULTIMEDIA ADAPTER



7. PULL OUT YOUR CD CHANGED BY MEANS OF APPROPRIATE TOOLS.



8.FROM OPTIC FIBER CONNECTOR OF CHANGER DISCONNECT OPTICAL WIRE WHICH IS UNDER „OUTPUT” ARROW AND CONNECT IT BY MEANS OF CONNECTOR WITH OPTICAL FIBER OF AUX OUTPUT ADAPTER. OPTICAL FIBER CABLE WITH „INPUT” ARROW PLEASE CONNECT TO FREE OUTPUT SOCKET OF CD CONNECTOR.



9.CONNECT POWER SUPPLY VNS AUX BY MEANS OF PLUG&PLAY CABLE. IF YOU BOUGHT VNS AUX STANDARD PLEASE CONNECT RED WIRE TO 12V POWER SUPPLY OF CD CHANGER AND BLACK TO BROWN WIRE OF CD CHANGER.

